


Greatway



TEL: 0532-83183228

Email: info@duplospneus.com

www.duplospneus.com

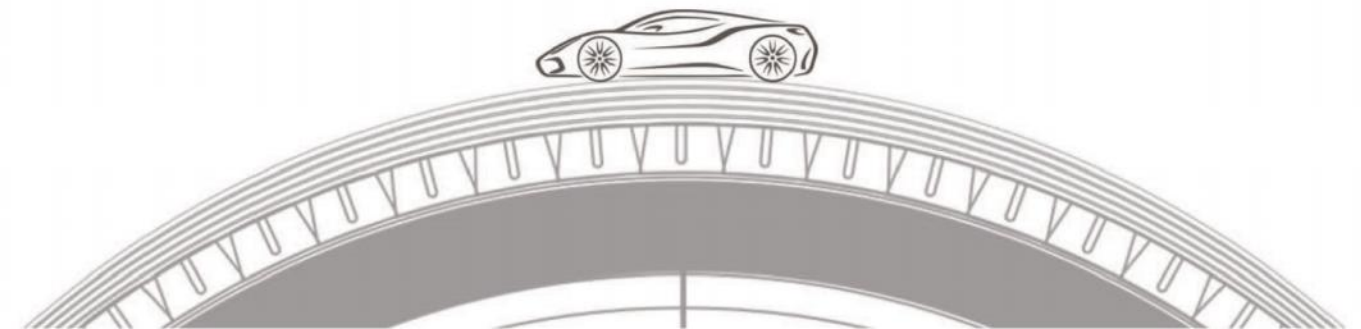

GREATWAY TIRE PATTERN

**GW668****GW118****GW388****GW280****GW666****GW777****GW380****HR566****GW998****M866****HR568****GREEN POWER S1**

GREATWAY TIRE PATTERN



SL508



CAVALRY



BT2000



GW188



GW360



SPORT A/W1



ST RADIAL TIRES



S106



GW168



SUPER UHP1



GW-ICE



SNOWLAND



GW668

- ◆非对称花纹设计，提供卓越的弯道抓着力，保障了行驶进程的稳定性，同时提供优良的排水性能；
- ◆优化节距宽度与排列及节距位移的设计，有效降低行驶中的噪音。
- ◆ Asymmetric pattern design, providing excellent traction performance on curve road, stable driving,and good drainage performance;
- ◆ Optimize the pitch width and arrangement and the design of the pitch displacement, effectively reducing thenoise in driving.

SIZE 型号	LI/SS 负荷/速度	SW 断面宽 (mm)	OD 外直径 (mm)	RIM 轮辋	PRESSURE 气压(KPA)
205/40ZR17	84WXL	212	596	7½J	340
205/45ZR17	88WXL	206	616	7J	340
205/50ZR17	93WXL	214	638	6½J	340
205/55R17	95H	214	658	6½J × 17	340
215/40ZR17	87WXL	218	604	7½J	340
215/45ZR17	91WXL	213	626	7J	340
215/50ZR17	95WXL	226	648	7J	340
215/55R17	94V	226	668	7J	300
225/45ZR17	94WXL	225	634	7½J	340
225/50ZR17	98WXL	233	658	7J	340
225/55R17	97V	233	680	7J	300
235/55R17	99V	245	690	8	300
235/45ZR17	97WXL	236	644	8J	340
235/50R17	96V	245	668	7.5	300
225/55R18	98V	233	705	7	300
215/55R18	95V	226	693	7	300
225/40ZR18	92WXL	230	637	8J	340
225/45ZR18	95WXL	225	659	7½J	340

SIZE 型号	LI/SS 负荷/速度	SW 断面宽 (mm)	OD 外直径 (mm)	RIM 轮辋	PRESSURE 气压(KPA)
235/40ZR18	95WXL	241	645	8½J	340
235/45ZR18	98WXL	236	699	8	340
235/50R18	97V	245	693	7.5	300
235/55R18	100V	245	715	7.5	300
245/40ZR18	97WXL	248	653	8½J	340
245/45ZR18	100WXL	243	677	8J	340
245/50R18	100V	253	703	7.5	300
255/45ZR18	103WXL	255	687	8J	340
255/55R18	109VXL	265	737	8	340
225/55R19	99V	233	731	7	340
235/55R19	105VXL	245	741	7.5	340
245/45R19	98V	243	703	8J × 19	300
245/55R19	107VXL	253	753	7.5	340
255/50ZR19	107WXL	265	739	8	340
255/55R19	111VXL	265	763	8	340
235/55R20	102V	245	766	7.5	300
245/35ZR20	95WXL	248	680	8.5	340
245/40ZR20	99WXL	248	704	8.5	340
245/45R20	103VXL	243	728	8J × 20	340
255/45R20	105VXL	255	738	8½J × 20	340
265/50R20	111VXL	277	774	8½J	340
275/35ZR20	102WXL	278	700	9.5	340
275/40ZR20	106WXL	278	728	9.5	340
275/45R20	110VXL	273	756	9	340
275/55R20	117VXL	284	810	8.5	340
285/50R20	116VXL	297	794	9	340
315/35ZR20	110WXL	320	728	11	340
285/30R21	100W	295	731	10J	340
245/35ZR21	96WXL	248	705	8½J	340
275/45R21	110VXL	273	781	9J × 21	340



GW118

◆优异的排水性能:

①最佳沟槽数和位置设计，四个圆周方向沟槽和横向沟槽的最佳组合，有效提升了排水性能

◆几何切角设计:

①防止花纹块在刹车时发生卷边效应，有效增大接地面积

②几何切角设计的花纹块边缘能刮掉水膜，缩短刹车距离

◆肋状花纹块设计:

①使轮胎发挥出精准的操控性，有效保障了驾驶安全

②大花纹块设计，拥有更好的抓地力，享受更好的驾乘体验

SIZE 型号	LI/SS 负荷/速度	SW 断面宽 (mm)	OD 外直径 (mm)	RIM 轮辋	PRESSURE 气压(KPA)	RP 轮辋保护	SW 胎侧
225/45ZR18	95WXL	225	659	7½J	340	YES	BSW
245/45ZR18	100WXL	243	677	8J	340	YES	BSW
255/40ZR18	99W XL	260	661	9	340	YES	BSW
275/40ZR18	103W XL	278	677	9.5	340	YES	BSW
225/40ZR19	93WXL	230	663	8J	340	YES	BSW
235/40ZR19	92W	241	671	8½J	300	YES	BSW
235/50ZR19	99W	245	719	7½J	300	YES	BSW
245/35ZR19	93WXL	248	655	8½J	340	YES	BSW
245/40ZR19	98W XL	248	679	8½J	340	YES	BSW
255/40ZR19	100W XL	260	687	9J	340	YES	BSW
245/45ZR19	102W XL	243	703	8	340	YES	BSW
255/35ZR19	96WXL	260	661	9J	340	YES	BSW
255/45ZR19	100W	255	713	8½J	300	YES	BSW
275/35ZR19	100W XL	278	675	9½J	340	YES	BSW
275/40ZR19	105W XL	278	703	9.5	340	YES	BSW
285/30ZR19	98WXL	290	655	10J	340	YES	BSW
245/40ZR20	99W XL	248	704	8.5	340	YES	BSW

SIZE 型号	LI/SS 负荷/速度	SW 断面宽 (mm)	OD 外直径 (mm)	RIM 轮辋	PRESSURE 气压(KPA)	RP 轮辋保护	SW 胎侧
255/40ZR20	101W XL	260	712	9J	340	YES	BSW
275/35ZR20	102W XL	278	700	9.5	340	YES	BSW
255/45R21	102V	255	763	8½J	300	YES	BSW
275/35ZR21	103WXL	278	725	9½J	340	YES	BSW
275/40ZR21	107W XL	278	753	9½J	340	YES	BSW
275/50R21	113V XL	284	809	8½J	340	YES	BSW
315/30ZR21	105WXL	320	723	11J	340	YES	BSW
315/35ZR21	111W XL	320	753	11J	340	YES	BSW
NEW! 195/50R18	86V	201	653	6	300	YES	BSW
NEW! 255/50ZR18	106W	265	713	8	300	YES	BSW
NEW! 265/45ZR18	101W	266	695	9	300	YES	BSW
NEW! 235/35ZR19	91WXL	241	647	8.5	340	YES	BSW
NEW! 285/40ZR19	107W	290	711	10	300	YES	BSW
NEW! 295/30ZR19	100WXL	301	661	10.5	340	YES	BSW
NEW! 295/30ZR20	101WXL	301	686	10.5	340	YES	BSW
NEW! 235/35ZR20	92WXL	241	672	8.5	340	YES	BSW
NEW! 265/35ZR20	99WXL	271	694	9.5	340	YES	BSW
NEW! 285/35ZR20	104WXL	290	708	10	340	YES	BSW
NEW! 295/35ZR20	105WXL	301	714	10.5	340	YES	BSW
NEW! 295/40ZR20	110WXL	301	744	10.5	340	YES	BSW
NEW! 285/45ZR20	112WXL	285	764	9.5	340	YES	BSW
NEW! 295/45ZR20	110W	296	774	10	300	YES	BSW
NEW! 295/30ZR21	102WXL	301	711	10.5	340	YES	BSW
NEW! 255/35ZR21	98WXL	260	711	9	340	YES	BSW
NEW! 295/35ZR21	107WXL	301	739	10.5	340	YES	BSW
NEW! 295/40ZR21	111WXL	301	769	10.5	340	YES	BSW
NEW! 315/40ZR21	111W	320	785	11	300	YES	BSW



GW666

- ◆ 四条宽阔主沟，提高高速行驶过程中的排水性能，改善湿滑路面的转向和操控性能；
- ◆ 冠部采用大量的钢片加沟槽设计，提高抓地性能，抗湿滑性好，具备全天候性能；
- ◆ 内外侧非对称设计，有效的降低噪声又保证了抓地性能和良好操控性。

- ◆ Four wide grooves design, effectively improve the water evacuation and handling performance;
- ◆ The tread with steel disc and sipes designing, improve the wet traction performance;
- ◆ Unique asymmetric design for the inner and outer area, effectively reduce the noise.

SIZE 型号	LI/SS 负荷/速度	SW 断面宽 (mm)	OD 外直径 (mm)	PRESSURE 气压		RIM 标准轮辋
				KPA	PSI	
235/65R16	103T	240	712	300	44	7J
235/70R16	106H	240	736	300	44	7J
245/70R16	107T/111T	248	750	300	44	7J
265/70R16	112T	272	778	300	44	8J
215/60R17	96H	221	690	300	44	6½
225/60R17	99H	228	702	300	44	6.5J
235/60R17	102H	240	714	300	44	7J
225/65R17	102H	228	724	300	44	6.5J
235/65R17	104H	240	738	300	44	7J
245/65R17	107H/111T	248	750	300	44	7J
265/65R17	112T	272	776	300	44	8J
225/60R18	100H	228	727	300	44	6.5J
235/60R18	107HXL	240	739	340	49	7J
235/65R18	106H	240	763	300	44	7J
245/60R18	105H	248	751	300	44	7J × 18
285/60R18	116H	292	799	300	44	8½J



GW777

Optimized combined pitch design:

① Silent pattern design effectively reduces noise and brings a quieter driving experience

◆Precise control:

①High-density slot design improves braking and handling performance

②The central continuous pattern rib and pattern groove bottom reinforcement structure effectively improves control stability.

◆Dry and wet road safety:

① High-density zigzag grooves can effectively scrape off water film and have excellent wetland performance

② The staggered combination of pattern grooves improves drainage efficiency and brings excellent wet grip.

SIZE 型号	LI/SS 负荷/速度	SW 断面宽 (mm)	OD 外直径 (mm)	RIM 轮辋	PRES- SURE 气压(KPA)	RP 轮辋保护	SW 胎侧
215/60R17	96H	221	690	6½J	300	YES	BSW
215/65R17	99T	221	712	6½J	300	NO	BSW
225/60R17	99H	228	702	6½J	300	YES	BSW
225/65R17	102H	228	724	6½J	300	YES	BSW
235/60R17	102H	240	714	7J	300	YES	BSW
235/65R17	104H	240	738	7J	300	YES	BSW
245/65R17	107H	248	750	7J	300	YES	BSW
215/50R18	92V	226	673	7J	300	YES	BSW
225/50R18	95V	233	683	7J	300	YES	BSW
235/60R18	107H XL	240	739	7J	340	YES	BSW
235/65R18	106H	240	763	7J	300	YES	BSW
245/60R18	105H	248	751	7J	300	YES	BSW
255/60R18	112H XL	260	763	7½J	340	NO	BSW
265/60R18	110H	272	775	8J	300	NO	BSW
265/70R18	116T	272	829	8	300	YES	BSW
225/45R19	96V XL	225	685	7½J	340	YES	BSW
235/45R19	95V	236	695	8J	300	YES	BSW
235/50R19	99V	245	719	7½J	300	YES	BSW
235/65R19	109V XL	240	789	7	340	YES	BSW
245/50R19	105V XL	253	729	7½J	340	YES	BSW
255/45R19	100V	255	713	8½J	300	YES	BSW
255/60R19	109V	260	789	7½J	300	YES	BSW
265/50R19	110VXL	277	749	8½J	340	YES	BSW
275/55R19	111V	284	785	8.5	300	YES	BSW
235/45R20	100V XL	236	720	8J	340	YES	BSW
235/50R20	104V XL	245	744	7.5	340	YES	BSW
245/50R20	102V	253	754	7½J	300	YES	BSW
255/45R20	101V	255	738	8½J	300	YES	BSW
255/50R20	109V XL	265	764	8J	340	YES	BSW
255/55R20	110V XL	265	788	8	340	YES	BSW
265/45R20	108V XL	266	746	9	340	YES	BSW
275/45R20	110V	273	756	9J	340	YES	BSW
275/50R20	113V XL	284	784	8.5	340	YES	BSW
305/40R20	112V XL	313	752	11	340	YES	BSW
265/40R21	105V XL	271	745	9 ½J	340	YES	BSW
265/45R21	104V	266	771	9J	300	YES	BSW
285/40R21	109V	290	761	10J	340	YES	BSW
265/40R22	106V XL	271	771	9 ½J	340	YES	BSW
275/40R22	107V XL	278	728	9.5	340	YES	BSW
315/35R22	111V XL	320	779	11	340	YES	BSW
NEW! 235/60R19	107H	240	765	7	300	YES	BSW
NEW! 295/35R21	107VXL	301	739	10.5	340	YES	BSW
NEW! 315/35R21	111VXL	320	753	11	340	YES	BSW
NEW! 295/40R22	112VXL	301	795	10.5	340	YES	BSW



GW998

High-strength large tread block design:
①Large tread blocks, stronger rigidity and increased load-bearing capacity
② Cross pattern block design enhances driving stability
◆Multiple steel sheets and corner cutting design:
① Improve the grip performance on dry and wet roads and enhance the traction performance of driving
②The corner design of the pattern blocks enhances the stone discharge performance
◆Slingstone device:
①The mud elastic strips at the bottom of the ditch have a self-cleaning function and have better grip performance under harsh road conditions.
②The curved and sharp shoulder appearance provides extra grip.


SIZE 型号	LI/SS 负荷/速度	SW 断面宽 (mm)	OD 外直径 (mm)	RIM 轮辋	PRESSURE 气压(KPA)	RP 轮辋保护	SW 胎侧
235/70R16	106T	240	736	7J	300	YES	OWL
255/55R19	111T XL	265	763	8J	340	YES	OWL
245/70R16LT-8PR	113/110S	248	750	7J	450	YES	OWL
265/70R16LT-8PR	117/114R	272	778	8J	450	YES	OWL
225/65R17LT-8PR	107/103S	228	724	6½J	450	YES	OWL
235/65R17LT-8PR	109/105S	240	738	7J	450	YES	OWL
245/65R17LT-8PR	111/108S	248	750	7J	450	YES	OWL
245/70R17LT-10PR	119/116Q	248	776	7J	550	YES	OWL
245/75R17LT-10PR	121/118Q	248	800	7J	450	YES	OWL
265/65R17LT-10PR	120/117S	272	776	8J	550	YES	OWL
265/70R17LT-10PR	121/118Q	272	804	8J	550	YES	OWL
285/70R17LT-10PR	121/118Q	292	832	8½J	550	YES	OWL
315/70R17LT-10PR	121/118R	323	874	9½J	550	YES	OWL
265/60R18LT-10PR	119/116S	272	775	8J	550	YES	OWL
265/70R18LT-10PR	124/121Q	272	829	8J	550	YES	OWL
235/65R18LT-8PR	113/110Q	240	763	7J	450	YES	OWL
285/60R18LT-8PR	118/115S	292	799	8½J	450	YES	OWL
285/65R18LT-8PR	121/118Q	292	827	8½J	450	YES	OWL
235/55R19LT-8PR	105/101Q	245	741	7½J	450	YES	OWL
255/50R19LT-8PR	107/103Q	265	739	8J	550	YES	OWL



M866

- ◆宽胎面设计，宽胎面优化设计，提供有益的抓着性能和越野性能；
- ◆中心定向连续肋条，增冠部中心定向连续肋条，保持轮胎行驶的直线稳定性，肋条上的斜向小沟槽提高轮胎加速性。
- ◆ Wide tread design provide stronger traction and land cross performance;
- ◆ Ribs in the middle keep the tire going straightly;the grips on the rib improve the acceleration performance.

SIZE 型号	P.R 层级	LI/SS 负荷/速度	RIM 轮辋	SW 断面宽 (mm)	OD 外直径 (mm)	Load Single 单胎负荷		Load Dual 双胎负荷		PRES- SURE 气压(KPA)
						KG	LBS	KG	LBS	
31×10.50R15LT	6PR	109Q	8½J	268	781	1030	2270	/	/	350/50
33×12.50R15LT	6PR	108Q	10J	318	832	1000	2205	/	/	250/35
215/75R15LT	6PR	100/97Q	6 J	216	709	800	1765	730	1610	350/50
235/75R15LT	6PR	104/101Q	6½J	235	739	900	1985	825	1820	350/50
225/75R16LT	10PR	115/112Q	6 J	223	750	1215	2680	1120	2470	550/80
235/70R16LT	8PR	110/107Q	7 J	240	742	1060	2335	975	2150	450/65
235/85R16LT	10PR	120/116Q	6½J	235	812	1380	3042	1260	2778	550/80
245/75R16LT	10PR	120/116Q	7 J	248	780	1380	3042	1260	2778	550/80
265/75R16LT	10PR	123/120Q	7½J	267	810	1550	3415	1400	3085	550/80
285/75R16LT	10PR	126/123Q	8 J	286	840	1700	3750	1550	3415	550/80
265/70R17LT	10PR	121/118Q	8 J	272	810	1450	3195	1320	2910	550/80
285/70R17LT	8PR	121/118Q	8½J	292	838	1450	3195	1320	2910	450/65

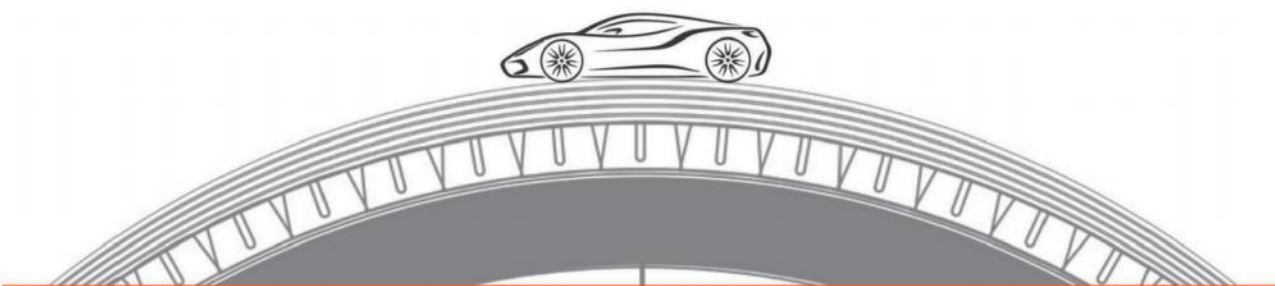



GW388

The pattern adopts a variable pitch design, which can effectively block noise and prevent and reduce noise.

- ◆The groove transition is smooth, which effectively prevents cracking at the bottom of the groove;
- ◆Unique tread formula design effectively reduces rolling resistance, reduces fuel consumption and improves driving mileage;

At the same time, it reduces exhaust emissions and is more environmentally friendly.

SIZE 型号	LI/SS 负荷 / 速度	SW 断面宽 (mm)	OD 外直径 (mm)	LOAD 负荷 (kg)	PRESSURE 气压 Kpa/Psi	RIM 标准轮辋
185/60R14	82H	189	578	475	300/44	5.5
185/65R14	86H	189	596	530	300/44	5.5
185/70R14	88H	189	616	560	300/44	5.5
195/60R14	86H	201	590	530	300/44	6
185/60R15	84H	189	603	500	300/44	5.5
185/65R15	88H	189	621	560	300/44	5.5
195/55R15	85V	201	595	515	300/44	6
195/60R15	88V	201	615	560	300/44	6
205/65R15	94H	209	647	670	300/44	6
195/50R16	84V	201	602	500	300/44	6
195/60R16	89H	201	640	580	300/44	6
205/60R16	92H	209	652	630	300/44	6
205/65R16	95H	209	672	690	300/44	6
215/55R16	97V XL	226	642	730	340/49	7
215/60R16	95H	221	664	690	300/44	6.5
215/65R16	102H XL	221	686	850	340/49	6.5
215/50R17	95WXL	226	648	690	340/49	7
215/55R17	94V	226	668	670	300/44	7
225/45R17	94WXL	225	634	670	340/49	7.5
225/50R17	98WXL	233	658	750	340/49	7
225/55R17	97V	233	680	730	300/44	7
235/55R17	99V	245	690	775	300/44	7.5
215/55R18	95V	226	693	690	300/44	7
225/40R18	92WXL	230	637	630	340/49	8
225/45R18	95WXL	225	659	690	340/49	7.5
225/55R18	98V	233	705	750	300/44	7
235/55R18	100V	245	715	800	300/44	7.5
245/45R18	100WXL	243	677	800	340/49	8
255/40R18	99W XL	260	661	775	340/49	9



GW380

- ◆采用三维设计的环向主沟，为轮胎的湿地排水性提供保障，提高湿滑路面的操控和制动性能；
 - ◆沟槽过渡顺畅，具有有效防止沟底开裂的效果；
 - ◆独特的胎面配方设计，有效降低滚动阻力，减少燃油消耗，提高行驶里程；同时减少废气排放，更环保。
-
- ◆ Three-dimension design providing better proformance for controlling and braking on mud road;
 - ◆ Smooth transition of grooves preventing tread cracking;
 - ◆ Unique tread designing efficiently reducing rolling resistance,saving energy, and more environmental.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷(kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
135/70R12	65R	290	300	44	4.00B
165/55R12	68R	315	300	44	5.00B
185/60R14	82H	475	300	44	5½J
185/70R14	88H	560	300	44	5½J
185/70R14	92S	630	340	49	5½J
185/60R15	84H	500	300	44	5½J
185/65R15	88H	560	300	44	5½J
195/50R15	82H	475	300	44	6J
195/55R15	85V	515	300	44	6J
195/60R15	88V	560	300	44	6J
195/65R15	95H/V	690	340	49	6J
205/60R15	91V	615	300	44	6J
205/70R15	96T	710	300	44	6J
215/70R15	98H	750	300	44	6½J
195/55ZR16	87W	545	300	44	6J
195/60R16	89H	580	300	44	6J
205/45R16	83H	487	300	44	7J
205/50ZR16	87W	545	300	44	6½J
205/55R16	94V	670	340	49	6½J
205/60R16	92H	630	300	44	6J
205/65R16	95H	690	300	44	6J
215/55R16	97V	730	340	49	7J
215/60R16	95H	690	300	44	6½J
215/60R16	99V XL	775	340	49	6½J
215/65R16	102H	850	340	49	6½J
225/55R16	95V	690	300	44	7J
225/60R16	98H	750	300	44	6½J
225/65R16	100H	800	300	44	6½J



GW280

- ◆三条宽阔的纵向排水沟槽，为轮胎的湿地排水性能提供了保障，有效的防止轮胎侧向水滑；
- ◆更大的花纹块，提高了轮胎的耐磨性和耐刺扎性，确保轮胎行驶稳定性，提高轮胎的加速性能和刹车制动性能；
- ◆独特的胎面配方设计，能有效抑制磨损，延长使用寿命。

- ◆ Three pieces wide vertical sipes providing better drainage performance on mud road,preventing lateral sliding efficiently;
- ◆ Big pattern blocks improve the wear-resisting performance and puncture-resisting performance;
- ◆ Unique tread designing providing longer tire life.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
155/65R13	73T	365	300	44	4.50B
165/65R13	77T	412	300	44	5.00B
165/70R13	79T	437	300	44	5J
175/70R13	82T	475	300	44	5J
155/65R14	75T	387	300	44	4½J × 14
165/60R14	75H	387	300	44	5J
165/65R14	79T	437	300	44	5J
165/70R14	81T	462	300	44	5J
175/65R14	82H	475	300	44	5J
175/70R14	84T	500	300	44	5J
185/65R14	86H/90H	530	300	44	5½J
155/60R15	74H	375	300	44	4½J
165/60R15	77T	412	300	44	5J
165/65R15	81H	462	300	44	5J
175/55R15	77H	412	300	44	5½J
175/60R15	81H	462	300	44	5J
175/65R15	84H	500	300	44	5J
185/55R15	82V	475	300	44	6J
T155/80R17	111T	1090	460	60	4T × 17



HR568

- ◆四条宽直沟槽设计，增强排水并提高湿地的操控性能；
- ◆附加坚固的钢带结构，增强了载重性能和安全性；
- ◆特殊的硅胶组成，提升了耐磨性和牢固性。

- ◆ Four Wide Straight Groove Design,Enhance excellent water evacuation and handling in wet and smooth condition;
- ◆ Super strong bead, improve load potential and safety;
- ◆ Special tread compound,improve wear and stability performance.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
6.00R14LT-10PR	100/96N	800/710	560	81	4½J
6.00R15LT-10PR	101/97P	825/730	560	81	4.50E
6.50R15LT-10PR	106/101N	950/825	560	81	5.50F
6.50R16LT-10PR	107/102N	975/850	560	81	5.50F
7.00R16LT-12PR	115/110N	1215/1060	670	97	5.50F
7.50R16LT-14PR	122/118Q	1500/1320	770	112	6.00G



HR566

- ◆胎面三条弯曲的沟槽，提供了在湿地和干地上高速行驶时所需的增强的抓地力；
- ◆胎面先进的角型设计，增强了排水性能，提高了湿地的牵引力；
- ◆附加坚固的钢带结构，增强了高速行驶的性能。

- ◆ Three crooked groove pattern design,provides excellent grip under high speed driving in wet and dry condition;
- ◆ Advanced Angle From pattern design,enhance water evacuation and improve traction in wet condition;
- ◆ Add strong steel belt construction,enhance high speed stability.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
185R14C-8PR	102/100Q	850/800	450	65	5½J
185R15C-8PR	103/102Q	875/850	450	65	5½J
195R14C-8PR	105/103Q	925/875	450	65	5½J
195R15C-8PR	106/104Q	950/900	450	65	5½J
195/70R15C-8PR	104/102Q	900/850	300	44	6J
195/65R16LT-8PR	99/96Q	775/710	450	65	6J
205/70R15C-8PR	106/104R	950/900	450	65	6J
205/75R15LT-8PR	103/100R	875/800	450	65	5½J
225/70R15C-8PR	112/110R	1120/1060	450	65	6.50B
175/75R16LT-8PR	97/94R	925/875	450	65	5J
185/65R15LT-8PR	94/91Q	690/615	450	65	5½J
195/60R15LT-8PR	95/92Q	690/615	450	65	6J
215/70R16LT-8PR	106/103Q	950/875	450	65	6½J × 16
195/75R16LT-10PR	107/103Q	975/875	550	80	5 1/2J



GW360

- ◆采用三维设计的环向主沟，为轮胎的湿地排水性提供保障，提高湿滑路面的操控和制动性能；
- ◆沟槽过渡顺畅，具有有效防止沟底开裂的效果；
- ◆独特的胎面配方设计，有效降低滚动阻力，减少燃油消耗，提高行驶里程；同时减少废气排放，更环保。

- ◆ Three-dimension design providing better proformance for controlling and braking on mud road;
- ◆ Smooth transition of grooves preventing tread cracking;
- ◆ Unique tread designing efficiently reducing rolling resistance,saving energy, and more environmental.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (Kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
195/65R15	91H	615	300	44	6J
205/55R16	91V	615	300	44	6½J



CAVALRY

- ◆宽胎面设计，宽胎面优化设计，提供有益的抓着性能和越野性能；
- ◆中心定向连续肋条，增冠部中心定向连续肋条，保持轮胎行驶的直线稳定性，肋条上的斜向小沟槽提高轮胎加速性。

- ◆ Wide tread design provide stronger traction and land cross performance;
- ◆ Ribs in the middle keep the tire going staightly;the grips on the rib improve the acceleration performance.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷(Kg)		PRESSURE 气压		RIM 标准轮辋
		SINGLE	DUAL	KPA	PSI	
215/75R15LT-6PR	100/97S	800	730	350	50	6J
215/75R15LT-8PR	106/103S	950	875	450	65	6J
235/75R15LT-6PR	104/101S	900	825	350	50	6½J
235/75R15LT-10PR	116/113S	1250	1150	550	80	6½J
245/70R16LT-8PR	113/110S	1150	1060	450	65	7J
27 × 8.5R14LT-6PR	95Q	690	-	350	50	7J



SL508

- ◆独特沙漠花纹设计，提高沙漠路面轮胎操控性能；
- ◆胎体采用多层超细高强度聚酯设计，增强了轮胎胎侧的强度及轮胎的舒适性，延长轮胎使用寿命。

- ◆ Special Sand Pattern design,improve handling in sand conditions;
- ◆ Super Strong Polyester In Tire Body,Improve Tire Sidewall Strength and Comfort and Extend Service Life.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
7.50R16LT-8PR	112/107R	1120/975	450	65	6.00G



GREEN POWER S1

- ◆三条主要直线沟槽以及阔圆锥状辅助沟槽确保排水性能优越；
- ◆宽型胎纹增强了轮胎对路面的附着力；
- ◆最佳排列组合减少噪音；
- ◆增大了轮胎的断面宽度，驾驶更舒适，操控性能更卓越。

- ◆ Three main straight groves and conical sipes provide excellent drainage proformance;
- ◆ Stronge traction with wide tread;
- ◆ Low noise with best arrangement of pattern blocks;
- ◆ Wide section makes your trip more comfortable and easy.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
165/65R13	77T	412	270	39	5J
165/70R13	79T	437	270	39	5.00B
165/80R13	83T	487	240		4.50B
165/70R14	81T	462	270	39	5J
175/65R14	82H	475	280	41	5J
185/65R14	86H	530	280	41	5½J
185/70R13	86H	530	300	44	5.50B
195/60R14	86H	530	280	41	6J
205/60R13	86T	530	250	36	6.00B
165R14LT-6PR	91/90Q	615/600	350	54	4½J
165R14LT-8PR	97/95Q	730/690	450	65	4½J
165/70R14LT-6PR	84/80Q	500/450	350	50	5J
165/70R14C-6PR	89/87R	580/545	375	54	5.00B



BT2000

- ◆ 三条宽而深的纵向花纹沟能够有效的排水；
 - ◆ 胎面上均匀分布的细花纹沟能够有效的保证在任何气压下轮胎与路面的良好接触并降低噪音；
 - ◆ 胎面肩部花纹块与细花纹沟呈规律性分布，有效的防止轮胎肩部的异常磨损；
 - ◆ 高强度钢丝带层与轮胎肩部大花纹块设计，具有出色的越野性能。
- ◆ Three wide and deep circumferential groove,enhance effective water evacuation;
- ◆ Equally distributed small groove,ensuring excellent grip and reduce sounds;
- ◆ Equally distributed small groove and pattern block , avoid unusual wear;
- ◆ Super strong steel belt and should big pattern block design,excellent off-road performance.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
225/75R15	102S	850	300	44	6J
235/75R15	109T XL	1030	340	49	6½J



SUPER UHP1

- ◆ 简易流畅的线条，卓越设计，灵活使用，高效稳定；
 - ◆ 可变凹槽及最佳间距，降低噪音；
 - ◆ 新材料运用，降低滚动阻力；
 - ◆ 宽花纹沟及宽带面设计，缩短了制动距离，提高了操控和制动性能。
- ◆ The simple and smooth lines, excellent design, flexible and practical, highly efficient and stable;
- ◆ Variable groove and the optimum spacing, reduce noise generation;
- ◆ The application of new materials, lower rolling resistance;
- ◆ Wide groove and wide tread design, shorten braking distance, improve the handling and braking performance.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
225/50R16	92V	630	280	41	7J
225/55R16	95V	690	280	41	7J



GW168

- ◆ 三条花纹沟槽及开放式胎主肩设计，具备良好的排水性；
 - ◆ 优秀的花纹设计，具备良好的高速性、耐磨性、抓地力；
 - ◆ 行驶噪音低。
- ◆ TThree sipes and open shoulder design offerring better drainage performance;
- ◆ Excellent pattern design providing high speed performance,wear resistance and traction performance;
- ◆ Low noise while driving.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
145R12C-8PR	86/84Q	535/500	450	65	4.00B
155R12C-8PR	88/86Q	565/535	450	65	4.50B



SPORT A/W1

- ◆ 对称花纹设计，灵活实用，高效稳定；
 - ◆ 胎面运用刀槽设计，把路面与轮胎冲击、摩擦产生的噪音降低到最低程度；
 - ◆ 宽花纹沟及宽胎面设计，缩短了制动距离，提高了操控和制动性。
- ◆ Symmetric designed pattern,flexible, practical and stable;
- ◆ Sipes on the tread ,the impact force and noise will be minimized to the lowest degree;
- ◆ The wide grooves and tread shorten the braking distance ,improve the controlling and braking performance.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
215/75R15	100S	800	260	38	6J



HR556

- ◆ 开放式胎肩横向花纹沟，使轮胎有良好的散热性能；
- ◆ 横向切割状抛物线花纹，避免不均匀磨损并降低噪音；
- ◆ 四道纵向花纹沟使轮胎具备良好的排水性能。
- ◆ Open type lateral groove design,ensuring excellent heat dispersion;
- ◆ Lateral parabola pattern,avoid uneven wear and reduce sound;
- ◆ Four wide circumferential groove,enhance excellent water evacuation.

SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
155R13LT-8PR	90/88Q	600/560	450	65	4.50B
165R13C-8PR	94/93Q	670/650	450	65	4.50B
175R13LT-8PR	97/95Q	730/690	450	65	5.00B
175R14(C/LT)-8PR	99/97R	775/730	450	65	5J
165/70R13C-6PR	88/86S	560/530	375	54	5.00B
165/70R13C-8PR	88/85S	670/630	450	65	5.00B
175/70R14LT-6PR	95/93S	690/650	375	54	5J



GW188

- ◆ 对称花纹设计，优雅、动感、时尚、科技；
- ◆ 成熟3D防水防滑技术设计的花纹线，有效提高湿地制动；
- ◆ 外侧直花纹条纹和减噪设计，提高了抓地力，降低胎噪；
- ◆ 一体化肩部抑制偏磨条设计，有效减少轮胎肩部偏磨，确保均匀磨损。
- ◆ Symmetric pattern designing,Graceful,Dynamic,Fashionable,and Technological;
- ◆ Three-D technology of skidding resistance pattern providing better braking performance on mud road;
- ◆ Designed for lower noise and strong traction with straight pattern outside;
- ◆ Special designing reduce the shoulder partially worn out.


SIZE 型号	LI/SS 负荷/速度	LOAD 负荷 (kg)	PRESSURE 气压		RIM 标准轮辋
			KPA	PSI	
145/70R12	69T	325	250	36	4.50B
155/70R12	73T	365/805	250	36	4.50B
155/70R13	75T	387/853	250	36	4.50B
175/60R13	77T	412	300	44	5.00B



ST RADIAL TIRES

- ◆ 成熟3D防水防滑技术设计的花纹线，有效提高湿地制动，外侧直花纹条纹和减噪设计，提高了抓地力，降低胎噪；
- ◆ 胎侧补强胶料，加强轮胎钢度，在胎面边缘的带束层之间添加胶料加强其耐磨性。
- ◆ The mature 3D waterproof anti-skid technology design pattern line, effectively improve the wetland brake; lateral direct pattern of stripes and noise reduction design, improved grip, reduce the tire noise;
- ◆ The sidewall reinforcing rubber, strengthen the tire stiffness, add the glue between the tread edge belt material to enhance its wear resistance.

SIZE 型号	LI/SS 负荷/速度	MAX LOAD SINGLE 最大负荷 (Kg/LBS)	MAX LOAD DUAL 最大负荷 (Kg/LBS)	PRESSURE 气压		RIM 标准轮辋
				KPA	PSI	
ST175/80R13-6PR	91/87L	615/1356	545/1201	350	50	5J
ST205/75R14-6PR	100/96L	800/1764	710/1565	350	50	5½J
ST215/75R14-6PR	102/98L	850/1870	750/1650	350	50	6J
ST205/75R15-6PR	101/97L	825/1819	730/1609	350	50	5½J
ST205/75R15-8PR	107/102L	975/2149	850/1874	450	65	5½J
ST225/75R15-8PR	113/108L	1150/2535	1000/2205	450	65	6J
ST225/75R15-10PR	117/112L	1285/2833	1120/2469	550	80	6J
ST235/80R16-10PR	123/119L	1550/3417	1360/2998	550	80	6½J
ST235/85R16-10PR	125/121L	1650/3640	1450/3200	550	80	6½J

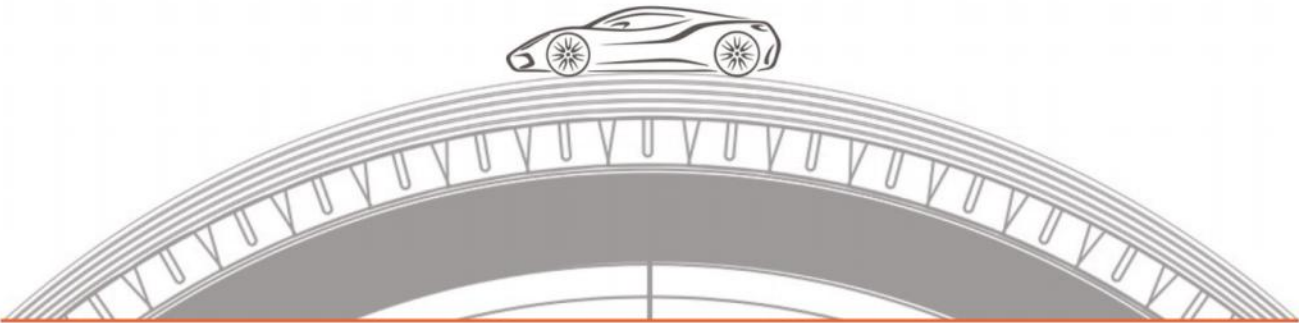



S106

- ◆V型胎面花纹设计，高效排水，减少打滑；降低噪音，保证在湿滑路面下优异的排水性能和操控性能；
- ◆高含量的白炭黑配方，提升湿地抓地力和刹车性能，保证冬季低温下良好的牵引性能，让您在严冬也能享受运动和越野的乐趣。
- ◆ V-shape tread design providing Efficient drainage performance,reducing the skid and noise,assuring high driving performance on a slippery road surface, such as rain or snow;
- ◆ High white carbon black content improve the performance of traction and braking on wet road, Let it be possible to enjoy the pleasure of sports and cross-country.

SIZE 型号	P.R 层级	LI/SS 负荷/速度	RIM 轮辋	SW 断面宽 (mm)	OD 外直径 (mm)	Load Dual 负荷		PRESSURE 气压 Kpa/Psi
						KG	LBS	
205/55R16	-	91H	6½J	214	632	615	1356	300/44
	-	94TXL				670	1477	340/49
215/50R17	-	95HXL	7J	226	648	690	1521	340/49
215/60R17	-	96T	6½J	221	690	710	1565	300/44
225/60R17	-	99T	6½J	228	702	775	1709	300/44
225/65R17	-	102S	6½J	228	724	850	1874	300/44
235/55R17	-	99H	7½J	245	690	775	1709	300/44
215/55R18	-	95H	7J	226	693	690	1521	300/44
225/60R18	-	104T/HXL	6½J	228	727	900	1984	340/49
235/45R18	-	94V	8J	236	669	670	1477	300/44
	-	98HXL				750	1653	340/49
235/50R18	-	101HXL	7½J	245	693	825	1819	340/49
235/55R18	-	100H	7½J	245	715	800	1764	300/44
245/45R18	-	100HXL	8J	243	677	800	1764	340
6.00R13LT	8PR	93/89L	4.50B	170	655	650/1433	580/1279	420/61
6.00R14LT	8PR	95/90L	4½J	170	680	690/1521	600/1323	420/61
6.00R15LT	8PR	97/92M	4.50E	170	705	730/1609	630/1389	460/67
6.50R16LT	10PR	107/102M	5.50F	185	750	975/2149	850/1874	560/81
7.00R16LT	12PR	115/110L	5.50F	200	775	1215/2679	1060/2337	670/97



GW-ICE

- ◆V型胎面花纹设计，高效排水，减少打滑；降低噪音，保证在湿滑路面下优异的排水性能和操控性能；
- ◆高含量的白炭黑配方，提升湿地抓地力和刹车性能，保证冬季低温下良好的牵引性能，让您在严冬也能享受运动和越野的乐趣。
- ◆ V-shape tread design providing Efficient drainage performance,reducing the skid and noise,assuring high driving performance on a slippery road surface, such as rain or snow;
- ◆ High white carbon black content improve the performance of traction and braking on wet road,Let it be possible to enjoy the pleasure of sports and cross-country.

SIZE 型号	LI/SS 负荷/速度	SW 断面宽 (mm)	OD 外直径 (mm)	RIM 轮辋	PRESSURE 气压(KPA)	RP 轮辋保护	SW 胎侧
215/55R17	94S	226	668	7	300	YES	BSW
225/50R18	95S	233	683	7	300	YES	BSW
225/55R18	98S	233	705	7	300	YES	BSW
265/65R18	114S	272	801	8	300	YES	BSW
225/55R19	99S	233	731	7	300	YES	BSW
235/50R19	99S	245	719	7.5	300	YES	BSW
235/60R19	107SXL	240	765	7	340	YES	BSW
255/55R19	107S	265	763	8	300	YES	BSW
235/50R20	100S	245	744	7.5	300	YES	BSW
245/45R20	99S	243	728	8	300	YES	BSW
255/45R20	101S	255	738	8.5	300	YES	BSW
255/55R20	107S	265	788	8	300	YES	BSW
285/45R20	108S	285	764	9.5	300	YES	BSW
275/45R21	107S	273	781	9	300	YES	BSW
285/40R21	105S	290	761	10	300	YES	BSW
275/40R22	104S	278	779	9.5	300	YES	BSW
285/40R22	106S	290	787	10	300	YES	BSW



SNOWLAND

- ◆V型胎面花纹设计，高效排水，减少打滑；降低噪音，保证在湿滑路面下优异的排水性能和操控性能；
- ◆高含量的白炭黑配方，提升湿地抓地力和刹车性能，保证冬季低温下良好的牵引性能，让您在严冬也能享受运动和越野的乐趣。
- ◆ V-shape tread design providing Efficient drainage performance,reducing the skid and noise,assuring high driving performance on a slippery road surface, such as rain or snow;
- ◆ High white carbon black content improve the performance of traction and braking on wet road,Let it be possible to enjoy the pleasure of sports and cross-country.

SIZE 型号	LI/SS 负荷/速度	RIM 轮辋	SW 断面宽(mm)	OD 外直径(mm)	Max Load		PRESSURE 气压(KPA/PSI)
					(kg)	(LBS)	
155/65R13	73T	4.50B	157	532	365	805	300
155/70R13	75T	4.50B	157	548	387	853	300/44
155/80R13	79T	4.50B	157	578	437	963	300/44
165/70R13	83TXL	5.00B	170	562	487	1074	340/49
175/70R13	82T	5.00B	177	576	475	1047	300/44
165/60R14	75H	5 J	170	554	387	853	300/44
165/70R14	81T	5 J	170	588	462	1019	300/44
175/65R14	82H	5 J	177	584	475	1047	300/44
175/70R14	84T	5 J	177	602	500	1102	300/44
185/60R14	82T	5½J	189	578	475	1047	300/44
185/65R14	86T	5½J	189	596	530	1168	300/44
185/70R14	88T	5½J	189	616	560	1235	300/44
195/60R14	86T	6 J	201	590	530	1168	300/44
195/70R14	91T	6 J	201	630	615	1356	300/44
175/65R15	84H	5 J	177	609	500	1102	300/44
185/55R15	86HXL	6 J	194	585	530	1168	340/49
185/60R15	84H	5½J	189	603	500	1102	300/44
185/65R15	88T	5½J	189	621	560	1235	300/44
195/50R15	86HXL	6 J	201	577	530	1168	340/49

SIZE 型号	LI/SS 负荷/速度	RIM 轮辋	SW 断面宽 (mm)	OD 外直径(mm)	Max Load		PRESSURE 气压(KPA/PSI)
					(kg)	(LBS)	
195/55R15	85H	6 J	201	595	515	1135	300/44
195/60R15	88T	6 J	201	615	560	1235	300/44
195/65R15	91T	6 J	201	635	615	1356	300/44
205/60R15	91H	6 J	209	627	615	1356	300/44
215/65R15	96H	6 1/2J	221	661	710	1565	300
195/55R16	87H	6 J	201	620	545	1201	300/44
205/45R16	87HXL	7 J	206	590	545	1201	340/49
205/55R16	91H	6½J	214	632	615	1356	300/44
205/60R16	92H	6 J	209	652	630	1389	300/44
215/55R16	97HXL	7 J	226	642	730	1609	340/49
215/60R16	99HXL	6½J	221	664	775	1709	340/49
215/65R16	98H	6½J	221	686	750	1653	300/44
225/55R16	99HXL	7 J	233	654	775	1709	340/49
205/45R17	88HXL	7J	206	616	560	1235	340/49
205/50R17	89H	6½J	214	638	580	1279	300/44
215/45R17	87H	7 J	213	626	545	1201	300/44
215/55R17	94H	7 J	226	668	670	1477	300/44
225/45R17	91H	7½J	225	634	615	1356	300/44
225/50R17	98HXL	7 J	233	658	750	1653	340/49
225/55R17	97H	7 J	233	680	730	1609	300/44
225/65R17	102S	6½J	228	724	850	1874	300/44
235/45R17	94H	8 J	236	644	670	1477	300/44
235/65R17	104S	7 J	240	738	900	1984	300/44
265/65R17	112S	8 J	272	776	1120	2469	300/44
225/40R18	92HXL	8 J	230	637	630	1389	340/49
235/65R18	110HXL	7J	240	763	1060	2337	340/49
255/55R18	109HXL	8J	265	737	1030	2271	340/49
235/55R19	105HXL	7½J	245	741	925	2039	340/49
275/40R20	106VXL	9½J	278	728	950	2094	340/49